


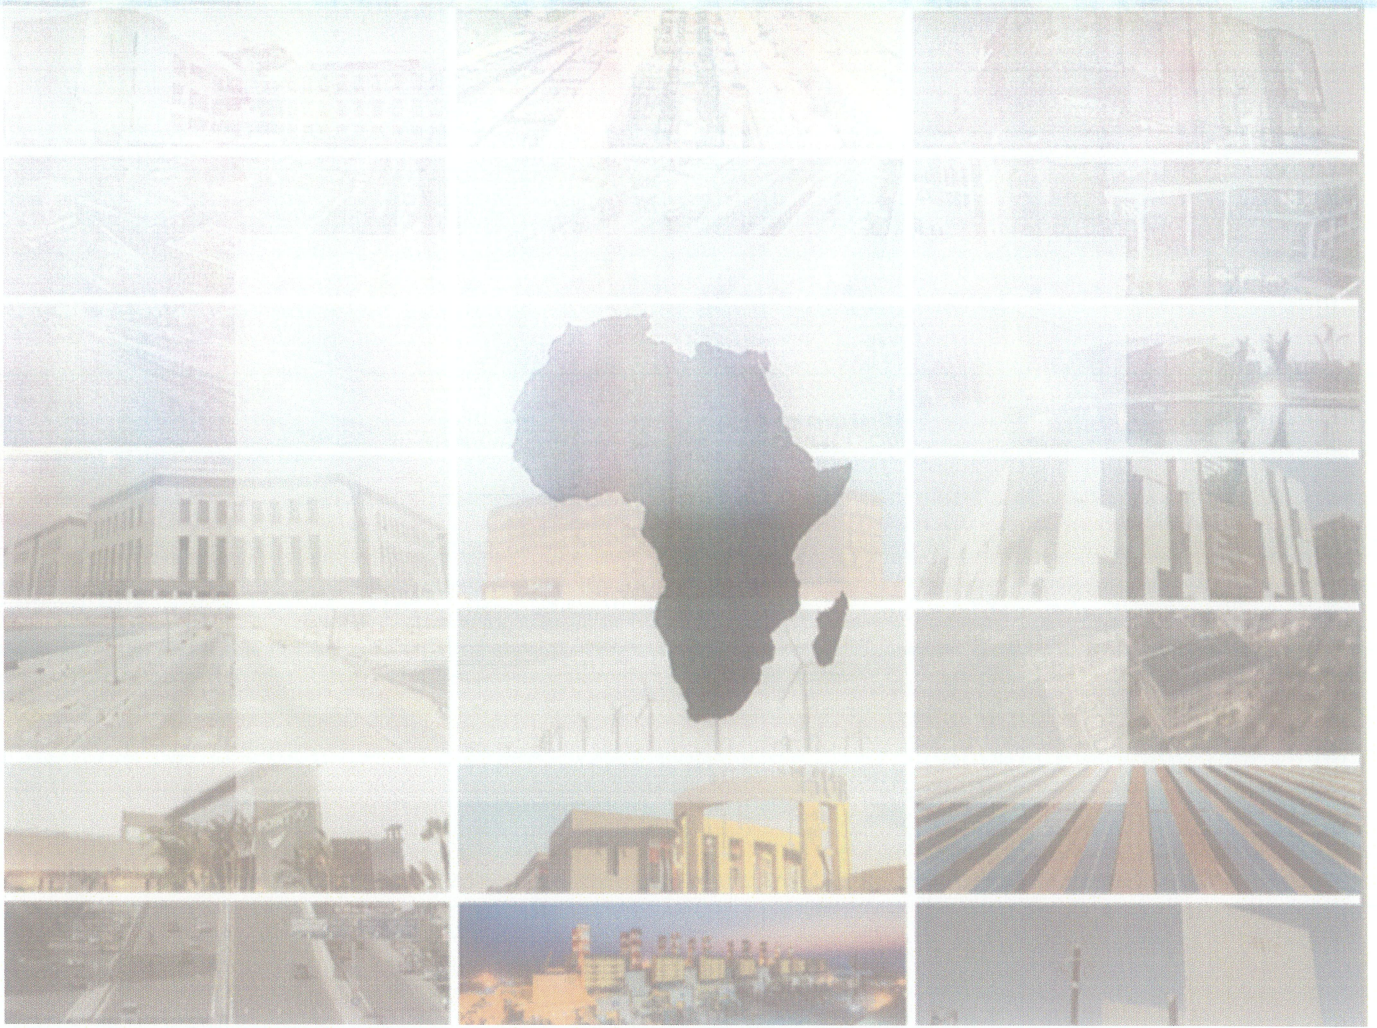

ROWAD
MODERN ENGINEERING

Control of Production Process P-QD-07

Prepared by:

Sameh El-Herazy

Quality Control Department Manager

Reviewed by:

Mohamed Ragab

COO

Approved by:

Mohamed Mahlab

CEO

June, 2026

	Control of Production Process		
	Effective Date: June 2026	Rev. no.: 02	Doc. no.: P-QD-07

1. OBJECTIVES

The objectives of this process are to address the procedures that will be taken to plan, monitor, measure and control the quality of the production during project life.

2. STAKEHOLDER

- Quality Control
- Procurement
- Construction
- HSE
- Technical Office Head Office
- Subcontractor

3. TERMS AND DEFINITION

- **QMS:** Quality Management System
- **RA:** Risk Assessment
- **HSE:** Health Safety Environment
- **QCM:** QC Manager
- **PM:** Project Manager
- **H.O TOM:** Head Office/Technical Office Manager
- **IR:** External Inspection Request
- **IIR:** Internal Inspection Request
- **ITL:** Independent Testing Laboratory
- **ITP:** Inspection and Test Plan
- **NCR:** Nonconformance Report
- **SNA:** Start New Activity
- **MS :** Method Statement
- **QM:** Quality Manual
- **RFQ:** Request for Quotation
- **MOM:** Minutes of Meeting

4. RELATED DOCUMENTED INFORMATION

- Internal Material Inspection Request, form no. F-P-QD-07-01
- Internal Inspection Request, F-P-QD-07-02
- Quality Performance Indicator, F-P-QD-07-03
- Inspection Request log, F-P-QD-07-04

	Control of Production Process		
	Effective Date: June 2026	Rev. no.: 02	Doc. no.: P-QD-07

- Method Statement, F-P-QD-07-05
- ITP form, F-P-QD-07-06
- Method Statement Log, F-P-QD-07-07
- Checklist, F-P-QD-07-08
- Inspection Request, F-PQP-01-05
- RFQ, F-P-VMO-01-01
- Site NCR Report, P-QD-02-02
- Cost of Repair and Rework, F-P-QD-02-04
- Control of Measuring Devices, F-P-QD-03-01
- Minutes of Meeting, F-P-QD-06-02
- ITP Log F-P-QD-12-01
- Start New Activity, F-PQP-01-13

5. PROCESS DETAILS

5.1 PROCESS INPUT

- Customer Requirements
- Contractual Requirements
- Project Specifications and Scope of Work
- Project Drawings
- ITP
- Statutory and Regulatory Stipulations
- Related Recognized Standard/Codes
- Variation Orders

5.2 Process Operations

Sr.	Process Cycle Description	Responsibility	Form
1	PM shall forward a project e-filing link for all project documents (specifications, drawings, etc.) to the QCM on site.	PM QCM	
2	Once project is awarded, PM shall contact the QC Department Manager concerning the new project's quality control team, numbers, and qualifications to prepare the Organizational Staff plan.	PM QC	Organizational Staff Plan F-P-PC-02-01
3	QC Organization Chart QCM / QC Projects Manager on site shall prepare in coordination with the QC dept. mgr. the QC organization	QCM QC Projects Manager	QC Organization Chart

	Control of Production Process		
	Effective Date: June 2026	Rev. no.: 02	Doc. no.: P-QD-07

Sr.	Process Cycle Description	Responsibility	Form
	chart mentioning names and locations of their activity and forward to the PM for his confirmation. Organization chart shall be updated, as necessary.	QC Dept. Manager	
4	QCM on site or the TL shall ensure that all QC team are aware of the project's specifications & Rowad QMS.	QCM TL	MOM F-P-QD-06-02
5	Preparation of the Quality Control Plan QCM on site shall update the Quality Control Plan previously submitted during tender stage.	QCM TL	PQP-01
6	Laboratory/Third Party/Batch Plant: H.O TOM receives quotations after submitting RFQ to the list of approved ITL/Batch Plant/third party and send the technical offers to the QCM on site for technical review and selection of required test and apparatus. Initial selection shall be done by the H.O TOM and submitted for the client's approval.	H.O T.O QCM	RFQ F-P-VMO-01-01
7	QC prepare MS/ITP Log along for all deemed necessary activities on site, then forwarded to the Planner to provide the planning dates as per the initial Baseline within 25 days from Tendering handover meeting.	QC Planning	MS/ITP Log F-P-QD-12-01 F-P-QD-07-07
8	Method Statement will be prepared by CM, reviewed, and updated by the TO and approved by QC on site, RA to be attached. Official submission by TO.	CM TO QC	Method Statement Form F-P-QD-07-05
9	ITP and Check list will be prepared by the QC Manager as per the project's specifications and requirements, then send it to the CM, followed by TO for review and official submission for the ITP only.	QC CM TO	ITP F-P-QD-07-06 Checklist F-P-QD-07-08 RA
10	In case of work carried out by an S/C, his responsibility is to submit the MS related to his scope of work to the CM (Meeting to be conducted if required) and follow step 8. Approved MS shall be distributed within 24 hours to all the parties concerned and related S/C by TO.	CM TO DC	Method statement F-P-QD-07-05
11	Preparatory meetings CM shall arrange preparatory meetings with all concerned parties (PM-QC-TO-Planning-S/C-HSE and		

	Control of Production Process		
	Effective Date: June 2026	Rev. no.: 02	Doc. no.: P-QD-07

Sr.	Process Cycle Description	Responsibility	Form
	This shall be made with the exact construction techniques and materials that will be used on the project to: • Evaluate the installer capabilities • Investigate the condition of the product • Evaluate multiple design solutions • Foreseen problems that may occur • Estimate the duration required for installation • Satisfy the customer's comments prior to work commencement. Upon mockup completion, Internal IR to be issued from construction to QC. Upon acceptance External IR to be submitted to the client.	PM CM QC	
13	Before the beginning of a work item, the CM shall issue a "Start New Activity" form for QC Manager's approval. Regular follow-up inspections by QC as per ITP shall be conducted.	CM QC	SNA F-PQP-01-13 ITP F-PQP-01-06
14	After approval, QC shall issue "Start New Activity" to client. (If required)	QC	SNA F-PQP-01-13
15	Material Off-site Inspection PM shall arrange with QCM for off-site inspection during the stages of factory fabrication of a product (if needed) to ensure the quality of this product prior to shipment to site. Offsite inspection shall follow the project specifications, standards, shop drawing and approved ITP.	PM QCM	Off-site inspection
16	Material On-site Inspection Refer to P-QD-12 "Quality Plan, Inspection and Testing", P-QD-11 "Material Inspection Process" and P-FN-01 "Material Control Process" MRV is created by warehouse via Oracle for any incoming construction material by Rowad. QC carries out the external MIR for client approval if the Internal MIR complies.	QC	MRV (ERP) MIR F-P-QD-07-01
17	Sampling and testing QC shall monitor the quality of the delivered material frequently by sampling and testing at intervals as recommended in the project specifications, Egyptian standards, or equal standard. All official test results shall be uploaded and recorded on unifier by DC	QC DC PM	

	Control of Production Process		
	Effective Date: June 2026	Rev. no.: 02	Doc. no.: P-QD-07

Sr.	Process Cycle Description	Responsibility	Form
	PM shall arrange the financial and logistics for such process.		
18	When the work is ready for the final inspection, the construction shall inform the QC to inspect the work via Internal IR.	CM QC	Internal IR F-P-QD-07-02
19	When the inspected work complies with the job requirements, the QC shall prepare an external Inspection Request for the client's approval. Any comments arising from this inspection shall be monitored, followed up and rectified by the construction.	QC	IR F-PQP-01-05
20	Non-conformance Issued Internally by QC: When a non-conforming case or product is found, QC shall issue a Site NCR, describing the case of non-conformity as per standard process P-QD-02 "Control of Non-Conformity" and he shall define the root cause of the NCR. Breakdown of the rework shall be determined by the construction team for every issued NCR within 7 working days, reviewed by the QC and financial/time impacts to be evaluated by Projects Control.	Construction QC Project Control	Site NCR F-P-QD-02-02 Cost of Repair and Re-work F-P-QD-02-04
21	Non-conformance issued by the Client When NCR is raised by the client, the QC shall discuss with the CM the corrective actions required to close it, Refer to P-QD-02 "Control of Non-Conformity" Breakdown of the rework shall be determined by the construction team for every issued NCR within 7 working days, reviewed by the QC and financial/time impacts to be evaluated by Projects Control.	QC CM Project Control	Cost of Repair and Re-work F-P-QD-02-04
22	Control of Measuring devices Prior to start of a definable feature of work, QC shall monitor and ensure that all measuring equipment, tools, and devices related to quality job, have a valid calibration certificate from a recognized body and in a well functional condition as described in the "Control of Measuring Devices process (P-QD-03)" if required.	QC	Calibration Certificates
23	Weekly Quality Meeting and/or toolbox to be arranged by QCM inviting all concerned parties to discuss all quality issues.	QCM Concerned Parties DC	MOM F-P-QD-06-02

	Control of Production Process		
	Effective Date: June 2026	Rev. no.: 02	Doc. no.: P-QD-07

5.3 PROCESS OUTPUT

- Approved PQP
- Approved IIR
- Approved IR
- Verified Product

6. PROCESS RISK ASSESMENT

Included in the risk register form no. F-P-QD-05-01 “Risk Identification and Assessment” maintained by the HOD, along with the action plan to address risks and opportunities”.

7. PROCESS CONTROL

QA/QC Site Manager shall report to QA/QC department head the status of inspection.

8. PERFORMANCE MEASURES

The QC Manager on the site or the Quality Senior Engineer shall monitor and frequently report to the QA/QC department head the following key performance indicators:

- Percentage of Rejected IRs
- Number of NCRs per Discipline
- Time to Close the Opened NCR
- Cost of NCRs

9. DOCUMENT CHANGE HISTORY

No.	Revision Level	Description of Changes	Effective Date
01	00	Major Changes due to transition from ISO 9001:2008 to 9001:2015	01/12/2016
02	01	All Points	01/12/2021
03	02	1, 6-8, 11, 16, 17 &19	08/06/2026