


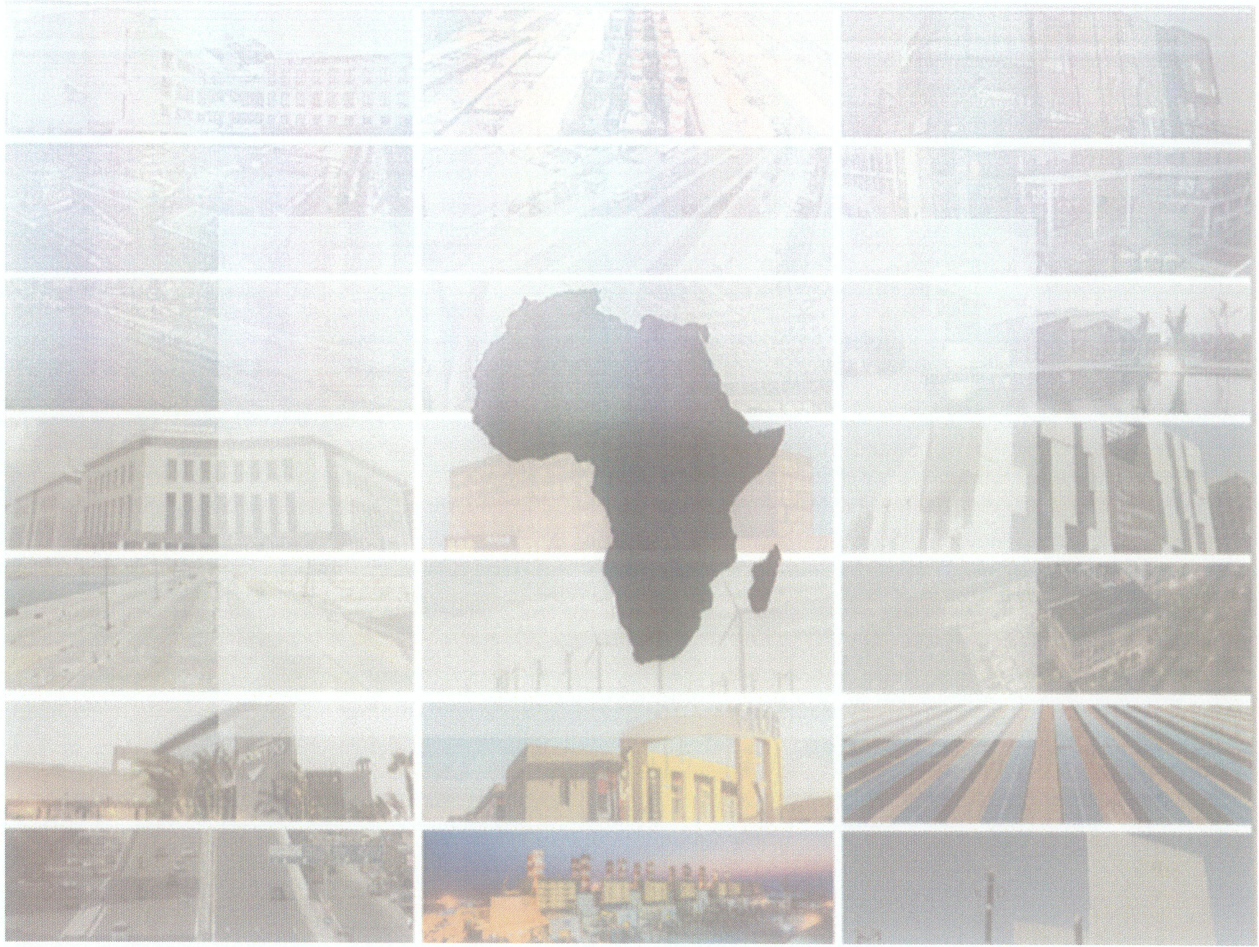

ROWAD
MODERN ENGINEERING

Quality Plan/Inspection and Testing Plan Process P-QD-12

Prepared by:

Sameh El-Herazy

Quality Control Department Manager

Reviewed by:

Mohamed Ragab

COO

Approved by:

Mohamed Mahlab

CEO

June, 2026

	Quality Plan, Inspection and Testing		
	Effective Date: June, 2026	Rev. no.: 01	Doc. no.: P-QD-12

1. OBJECTIVES

The objective of this process is to describe the inspection process and supporting documents, and to ensure that the inspection and test status of all work in the project is controlled in accordance with the project specification requirements and known at all stages of the construction process.

2. STAKEHOLDER

- Client
- Subcontractor /Supplier
- Construction
- QC
- T.O
- Third Party Testing Laboratories
- DC
- Formwork Engineer

3. TERMS AND DEFINITION

- **QCM:** Quality Control Manager
- **PM:** Project Manager
- **DC:** Document Control
- **ITL:** Independent Testing Laboratory
- **ITP:** Inspection and Test Plan
- **IR:** Inspection Request
- **IIR:** Internal Inspection Request
- **PQP:** Project Quality Plan
- **KPI:** Key Performance Indicator
- **Witness (W):** Consultant may witness, or inspect the work, while the works will proceed if not inspected no documentation required.
- **Document Review (R):** Documents to be reviewed, no signature required on the Inspection Request or its accompanying documentation.
- **Surveillance (S):** Random inspection at site, no documentation required.
- **Hold point (H):** The work will not proceed until the inspection is carried out.
- **Document Review:** Documents to be reviewed, no signature required on the Inspection Request or its accompanying documentation.

	Quality Plan, Inspection and Testing		
	Effective Date: June, 2026	Rev. no.: 01	Doc. no.: P-QD-12

- **Formwork:** Temporary mold & supporting structure for all vertical concrete elements (Columns – Walls -)
- **Falsework:** Temporary mold & supporting structure for all horizontal concrete elements. (Slabs – Beams -)

4. RELATED DOCUMENTED INFORMATION

- Internal IR, F-P-QD-07-02
- IR Log, F-P-QD-07-04
- ITP, F-P-QD-07-06
- ITP Log, F-P-QD-12-01
- IR, F-PQP-01-05
- Internal Inspection Request (IIR) – Falsework & Formwork, F-P-FW-01-24

5. PROCESS DETAILS

5.1 PROCESS INPUT

- Contract Specifications
- Method Statement
- Standards/Codes
- Drawings

5.2 Process Operations

Sr.	Process Cycle Description	Responsibility	Form
1	Preparation and Approval of Project Quality Plan (PQP) QC Manager shall prepare the project's quality plan within 15 days from the operation coordination meeting, and as per PQP 01 template and forms (last revision at the company server). The minimum requirements of PQP shall include the following: • Quality Policy • Quality Objectives • Project's Organization Chart • Job description of key staff • Incoming Material Control • Inspection and Testing Procedures • Quality Reports (Daily - Weekly - Monthly) • Data and Document Control • Internal Audit Process • Evaluation of Subcontractors and Suppliers	QCM	PQP-01

	Quality Plan, Inspection and Testing		
	Effective Date: June, 2026	Rev. no.: 01	Doc. no.: P-QD-12

Sr.	Process Cycle Description	Responsibility	Form
	- List of Method Statements - List of ITPs and relevant checklists - List of forms in the project		
2	The PQP shall refer to Rowad quality management system processes. After the approval of the PQP draft by QC Dept. Manager and PM, submission to the client shall be coded as "Revision 0". Thereafter, revisions shall be numerical. The approval of the PQP is the responsibility of QC Manager.	QCM QC Dept. Manager PM	PQP-01
3	QC shall obtain inspection requirements from the following sources: - Contract Requirements - Project Specifications - Issued for Construction Drawings (IFC) - Approved Shop Drawings - Agreed Local Standards/Codes - Related International Standards/Codes (ACI, BS, etc.), if stipulated. - Applicable Method Statement refer to "Control of Production Process" P-QD-09. - Material Technical datasheet. - Others	QC	
4	QC Manager shall prepare and maintain ITP Log for all deemed necessary activities on site, then forward to the Planner to provide the planning dates as per the initial Baseline within 25 days from Tendering Handover meeting.	QCM	ITP Log F-P-QD-12-01
5	The ITP shall contain and list the following: - Submission stage & Inspection stage - Quality related activities to be conducted - Reference documents to be used, and all characteristics to be briefed - Acceptance criteria - The verifying document on which to record the activity - Tests and tests frequency		ITP F-P-QD-07-06

	Quality Plan, Inspection and Testing		
	Effective Date: June, 2026	Rev. no.: 01	Doc. no.: P-QD-12

Sr.	Process Cycle Description	Responsibility	Form
	Persons/parties to be present for witness sampling, inspecting, testing, etc.		
6	ITPs are controlled documents and shall be prepared and coded as mentioned in the Project Quality Plan template – PQP 01. The draft document for submission to the client shall be coded as Revision 0. Thereafter, revisions shall be numerical. The document shall be revised to the next revision number whenever a change is made this includes changes to any form attached.	DC	ITP F-P-QD-07-06 PQP
7	ITPs shall be issued prior work commencement on site by the QC Manager as per the project's specifications and requirements, then send it to the CM, followed by TO for review and official submission to the Client	QCM TO CM	ITP F-P-QD-07-06
8	Approved ITP is distributed to all concerned parties by the Document Controller. The Senior QC Engineer is responsible for ensuring the following actions align with the approved ITP: - All inspection/tests are carried out and recorded on appropriate (IR) forms with all relevant details. - All required personnel have signed and dated the verifying document attached to the relevant ITP. - All supporting reports, documents, certificate, etc. are attached.	DC QC Engineer Concerned Parties	ITP F-P-QD-07-06 IR F-PQP-01-05
9	Inspection Process on Site The pre-construction approved mockup details shall be served as a reference during erection and inspection. Once the work is ready for External inspection, Site Engineer shall inform QC 1 day prior to the inspection via Internal IR. Internal QC inspection shall take place at locations where defined using the relevant checklist and according to ITP. If the work item is not complying with the specification requirements, the QC Engineer shall reject the internal IR and inform the Site Engineer with his comments, Site Engineer shall send internal IR Rev01 to QC Engineer	Site Engineer QC Engineer DC Site Engineer QC Engineer	ITP F-P-QD-07-06 Internal IR F-P-QD-07-02 IR F-PQP-01-05 IR Log

	Quality Plan, Inspection and Testing		
	Effective Date: June, 2026	Rev. no.: 01	Doc. no.: P-QD-12

Sr.	Process Cycle Description	Responsibility	Form
	after rectifying all QC comments, QC Engineer shall ensure that all his comments are fulfilled and approve the internal IR prior issue External IR to the client for inspection. If External IR is rejected, QC Engineer shall inform Site Engineer with the consultant comments. Site Engineer shall rectify the work then arise internal IR Rev01 to QC Engineer. IR log to be updated accordingly.	DC	F-P-QD-07-04
10	For Internal Inspections Not Required for the client e.g., (Mobilization- NCR Closure...etc.) Site Engineer shall raise IIR for QC Engineer inspection, If the work item is not complying with the specification requirements, the QC Engineer shall reject the internal IR and inform the Site Engineer with his comments.	Site Engineer QC Engineer DC	Internal IR F-P-QD-07-02
11	For Formwork IIR During project execution, Site Engineer shall raise IIR minimum 3 days prior to pouring (except for SOG & plain concrete) to QC engineer & Formwork engineer to follow up & inspect the formwork which will be used for concrete elements, and after QC approval, QC shall inform formwork engineer for the final inspection, IIR to be approved by site, QC and FW engineer. A copy of the above IIR to be sent to HSE Via E-mail / Unifier.	Site Engineer QC Engineer Formwork Engineer DC	Internal Inspection Request (Falsework & Formwork) F-P-FW-01-24 FW Installation Checklist F-P-FW-01-16
12	Independent Test Laboratories (ITL) Laboratory testing on-site may be delegated to an independent testing laboratory after Client approval. Laboratory shall work by its own quality procedures concerning use, maintenance and calibration of all equipment and molds in accordance with relevant standard, Calibration Certificates are available for review by QC upon request The ITL responsibilities shall be defined in the applicable ITPs.	Laboratory Representative QC Engineer/QCM DC	

	Quality Plan, Inspection and Testing		
	Effective Date: June, 2026	Rev. no.: 01	Doc. no.: P-QD-12

Sr.	Process Cycle Description	Responsibility	Form
	Prior to its implementation all forms of laboratory test results shall be submitted to the QC manager for his review and approval. Prior to start of work, QC Manager on site shall ensure that all equipment of ITL is calibrated, well-functioning and complies with the project's specification and recognized standards. Before obtaining Client's approval, ITL shall submit the resume of the site staff (engineers or technicians) to obtain approval from QC manager. All test reports shall be signed by the authorized Laboratory Engineer on site before submission to QC Manager. All test reports specified in the ITP compiled by the Laboratory's engineer shall be transmitted to Document Controller by QC.		ITL

5.3 PROCESS OUTPUT

- Inspection and Test Plan (ITP)
- Internal Inspection Request (IIR)
- Inspection Request (IR)
- Project Quality Plan (PQP)
- **Internal Inspection Request (Falsework & Formwork)**

6. PROCESS RISK ASSESMENT

Included in the risk register form no. F-P-QD-05-01 "Risk identification and assessment" maintained by the HoD, along with the action plan to address risks and opportunities".

7. PROCESS CONTROL

QCM and PM shall ensure that ITP and PQP are fully implemented during project execution.

8. PERFORMANCE MEASURES

QC Manager shall monitor the construction/inspection process through the percentage of acceptance/rejection of inspection request.

	Quality Plan, Inspection and Testing		
	Effective Date: June, 2026	Rev. no.: 01	Doc. no.: P-QD-12

9. DOCUMENT CHANGE HISTORY

No.	Revision Level	Description of Changes	Effective Date
01	00	New Issue	01/12/2021
02	01	1,4,5,7 & 9-11	08/06/2026



ROWAD
MODERN ENGINEERING